
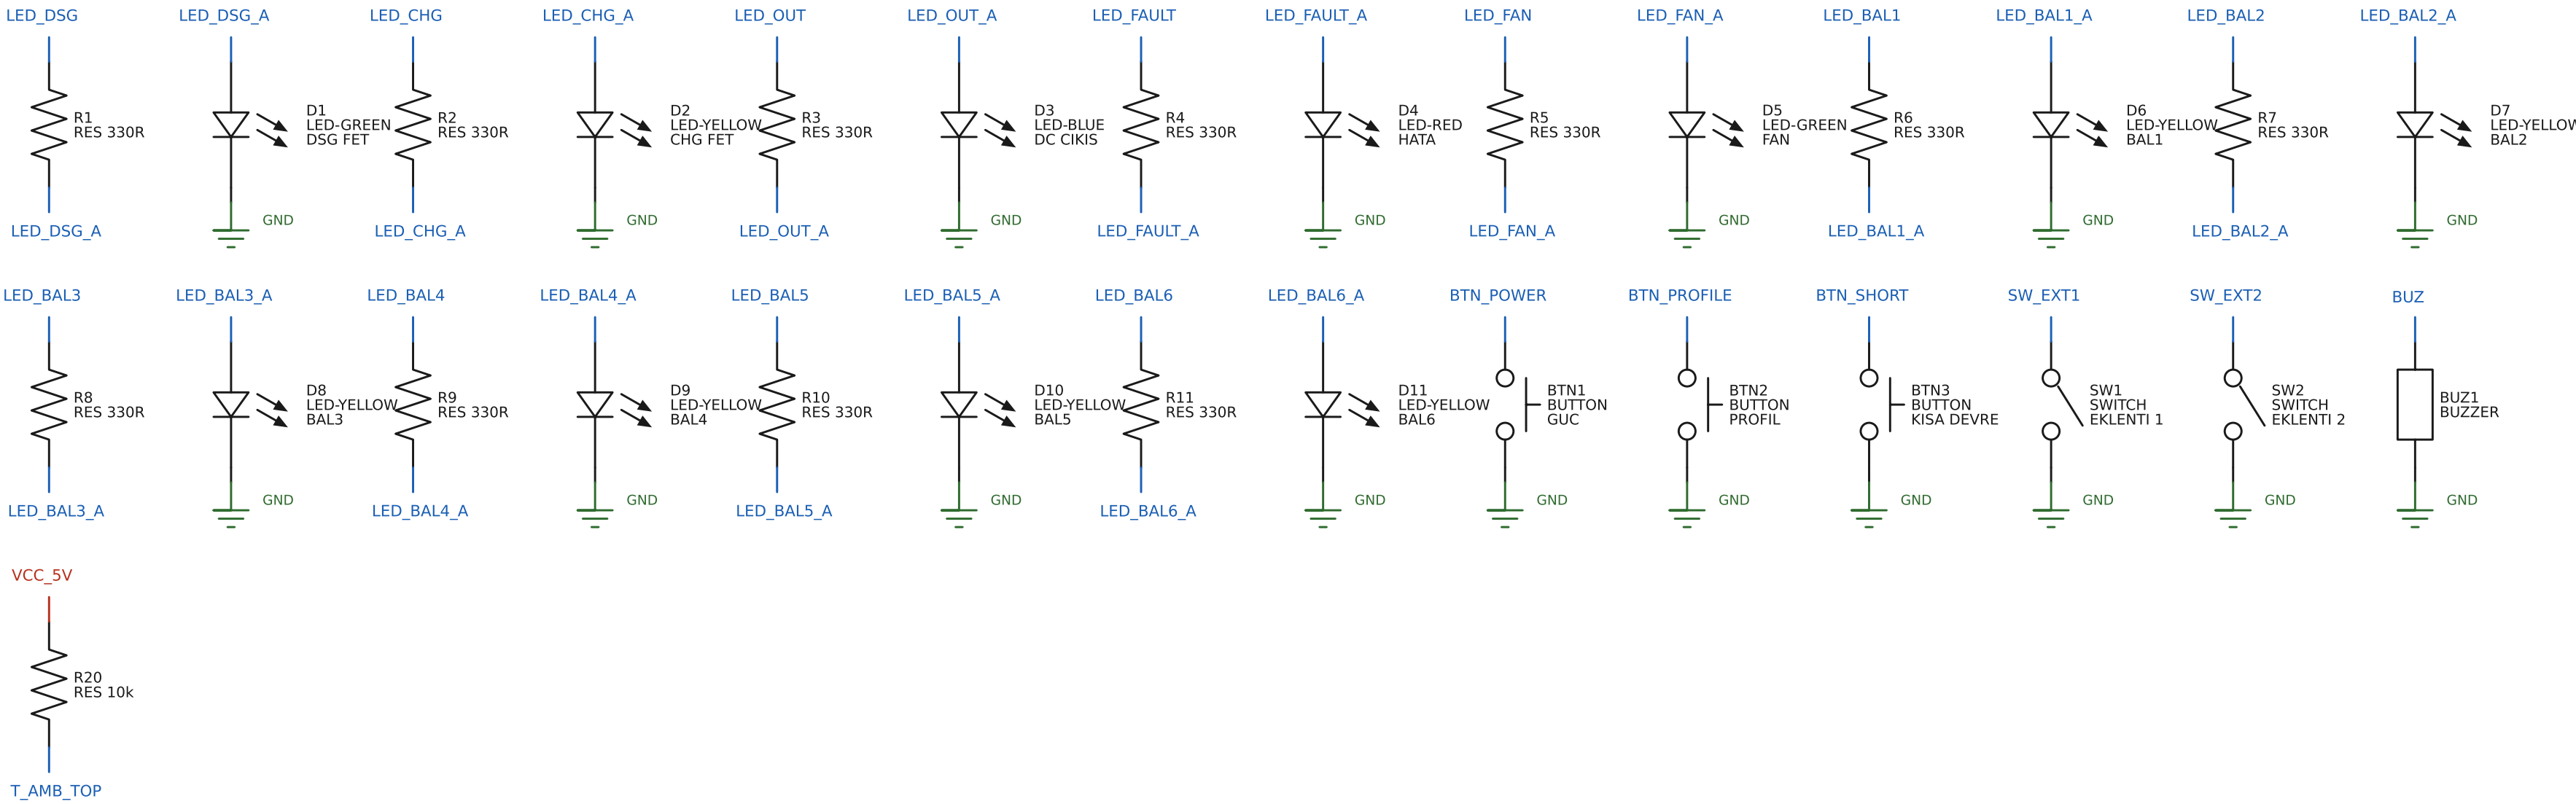
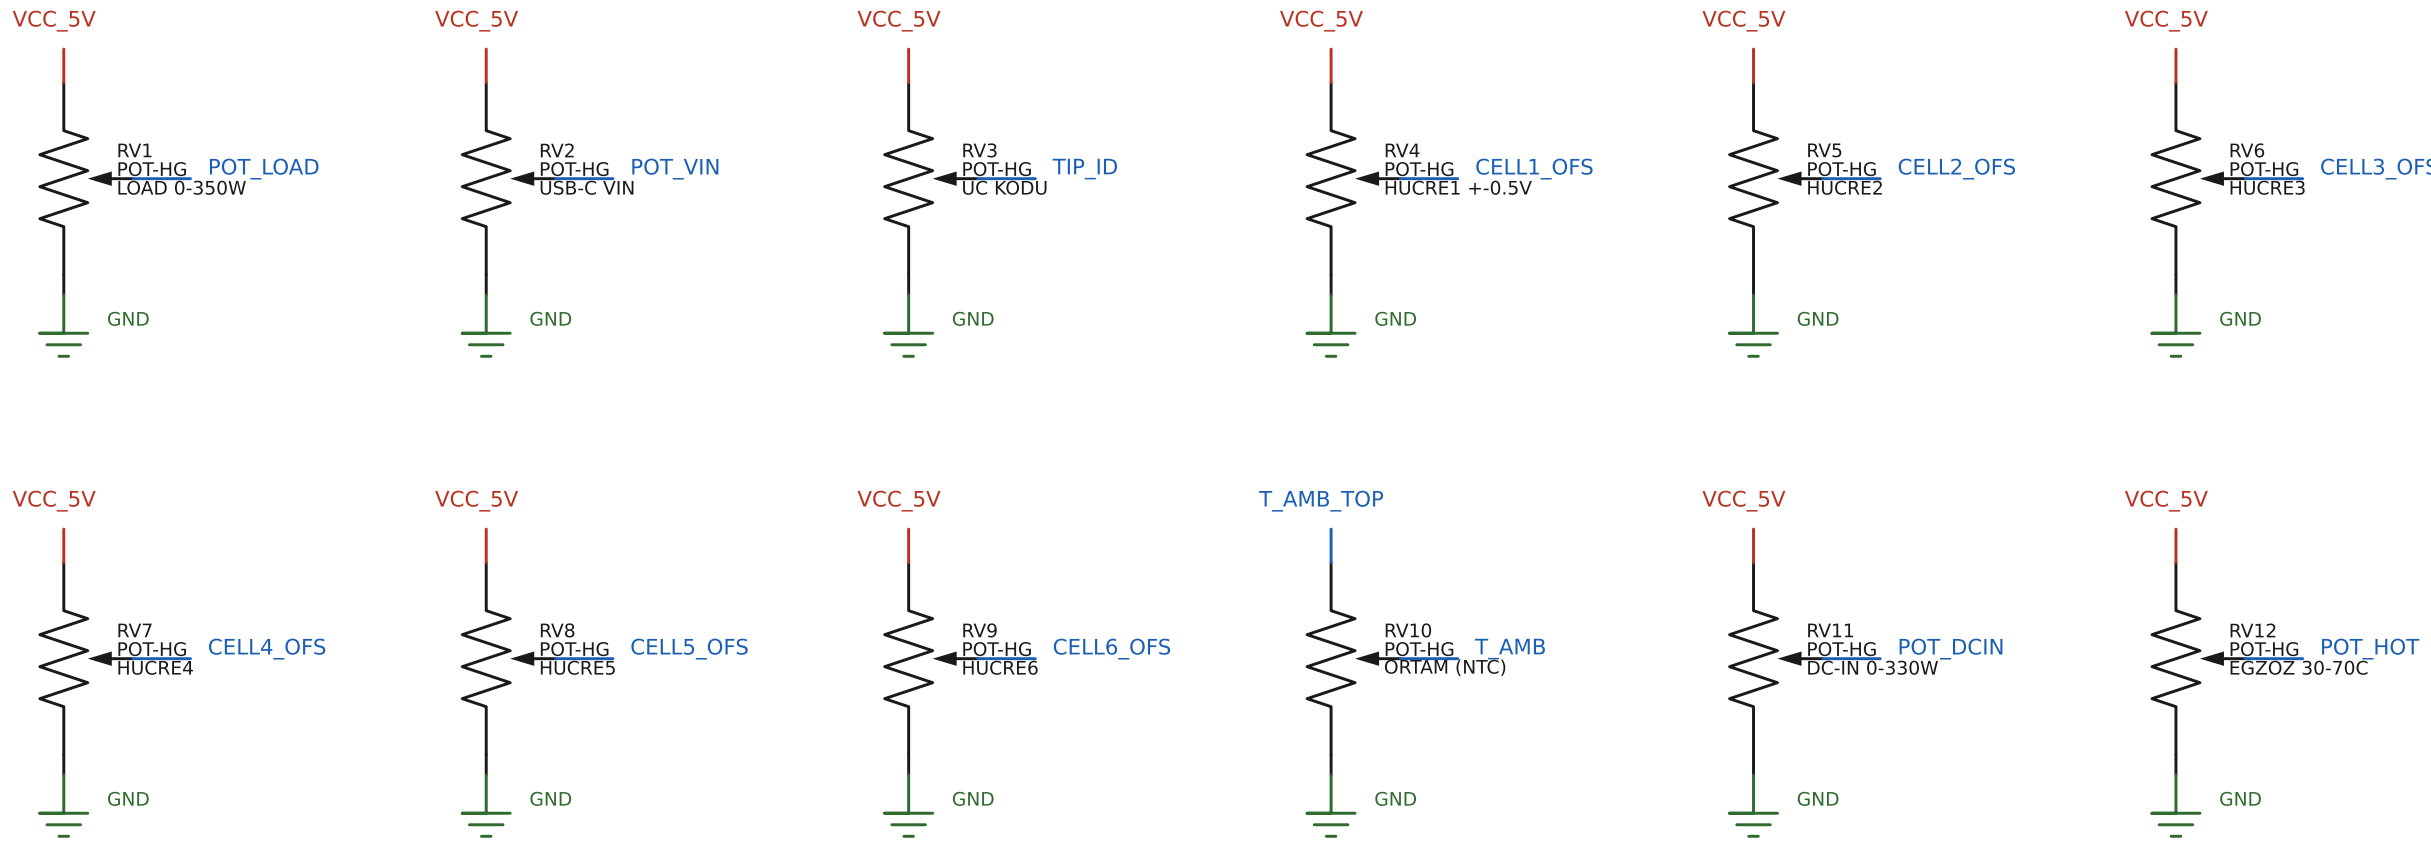
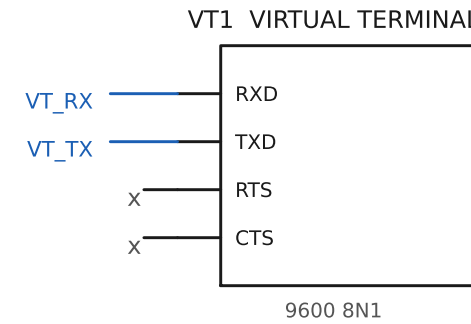
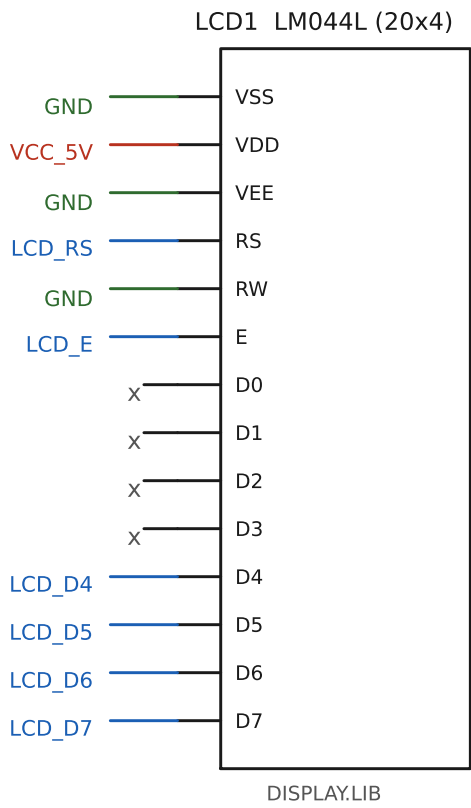


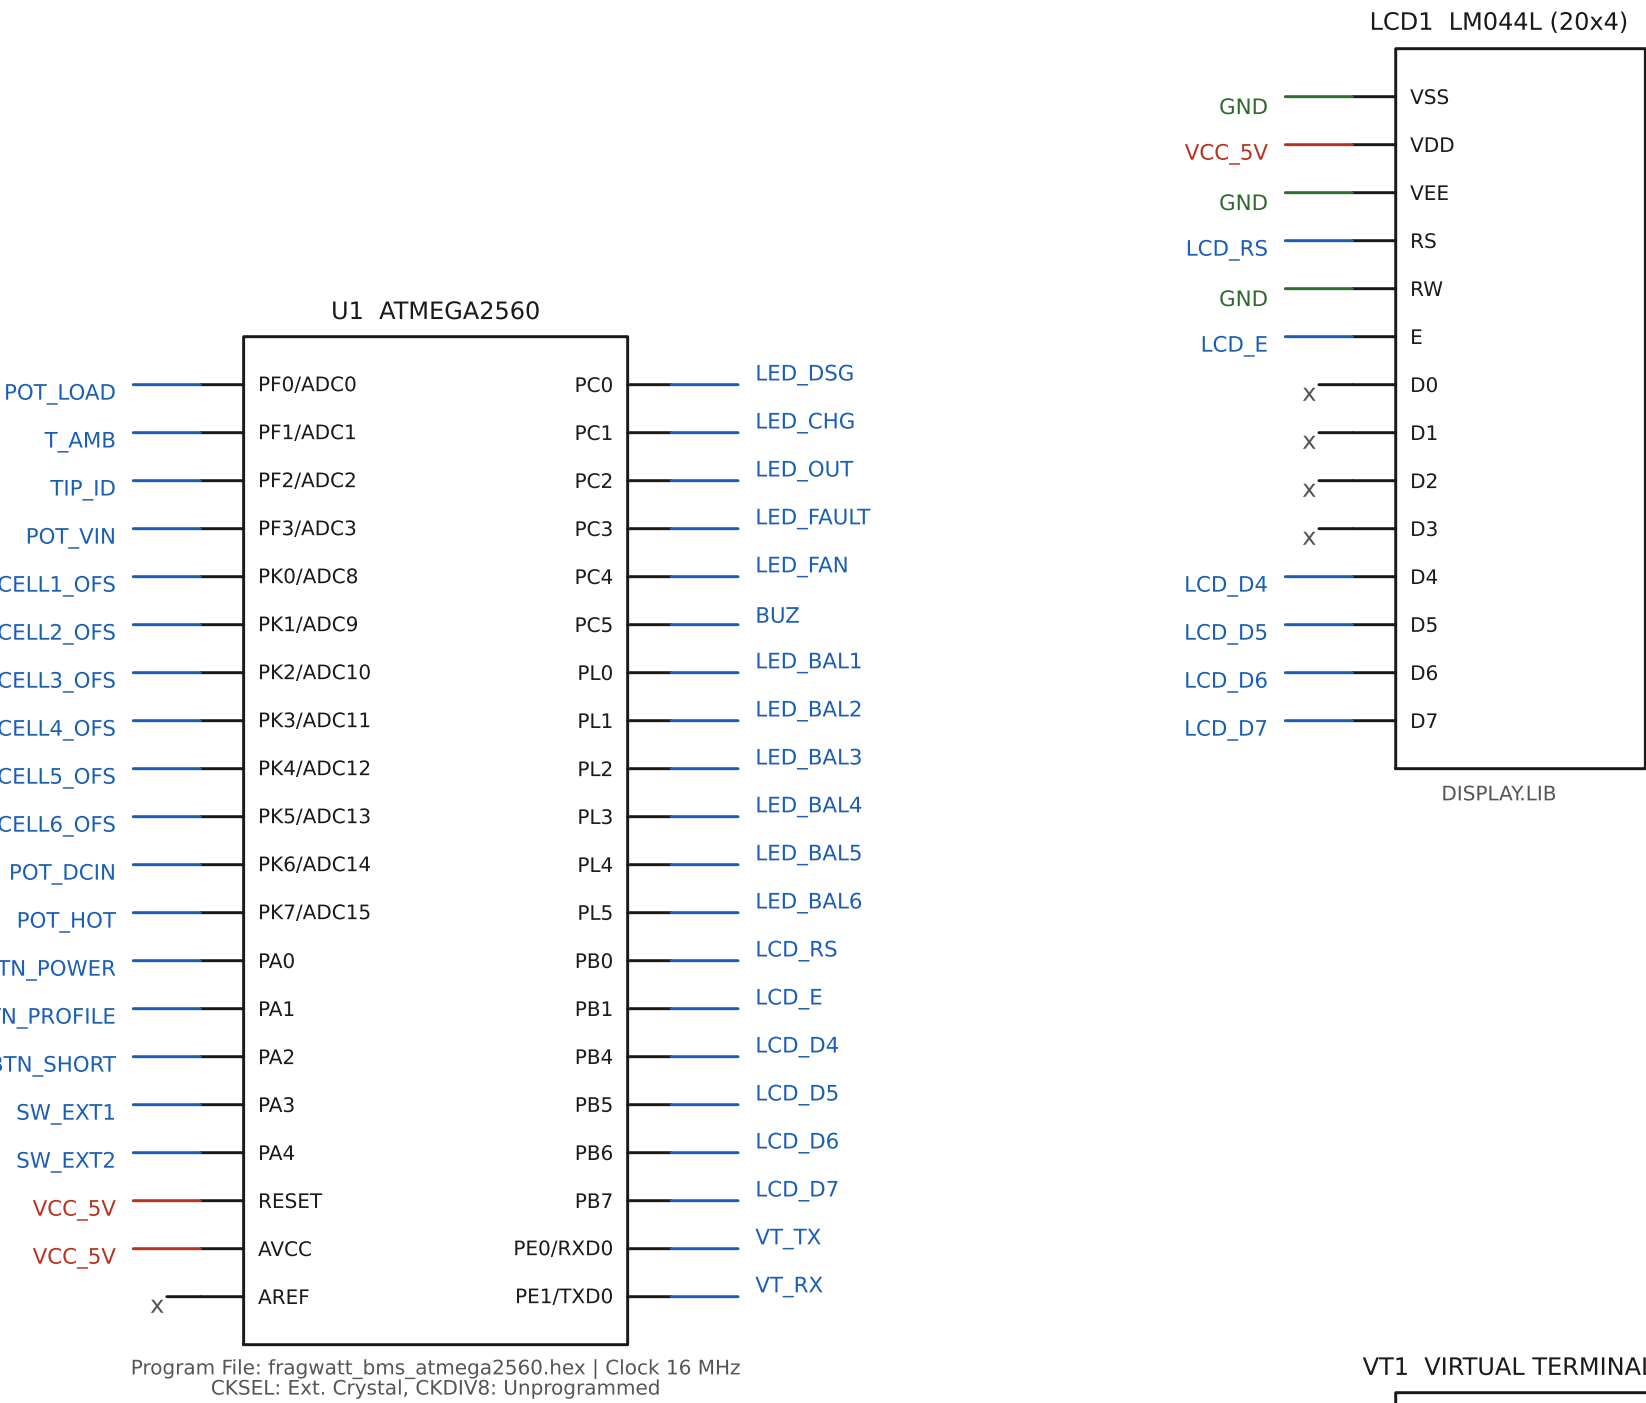

RV10 yerine gercek NTC kullanilacaksa: VCC_5V - RES 10k - T_AMB - NTC (10k, B3950) - GND. Potla: %50 = 25 C, %20 = ~60 C, %77 = ~0 C.
Hucre potlari ortada (%50) = 0 mV sapma; her %1 = 10 mV. LOAD potu %1 = 3.5 W. VIN potu 5/9/15/20/28/36/48 V'a oturur, %98 ustu = asiri gerilim testi.
Proteus'ta guc pinleri gizlidir (VCC/GND otomatik). Ayrinti: hardware/proteus/PROTEUS_KURULUM.md